


OUTPUT SIGNAL OPTIONS


4 TO 20 MA (EE=+)	
LOAD	FIGURE
0 TO 500 Ω	A
250 TO 800 Ω	B
1 TO 5 VOLTS (DD=+)	
LOAD	FIGURE
12K Ω MIN (400uA MAX)	C

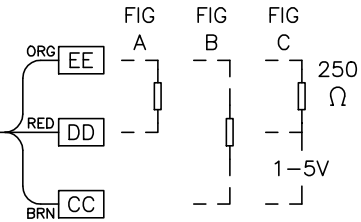

NOTE:
1. REMOVE JUMPER JA TO PREVENT HANDSWITCH INITIATED MOTION

TERMINAL CONNECTIONS FOR REMOTE CONTROL:

RET	C-M
EXT	C-N
STOP	NONE



SIZE:
A

17-5117-710

THIS DOCUMENT IS A COPY AND IS NOT THE SOURCE DOCUMENT. INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE. THE INFORMATION CONTAINED HEREIN IS COPYRIGHTED BY HAROLD BECK AND SONS, INC. CHANGES TO THE DOCUMENT ARE PROHIBITED. CONTACT A BECK SALES ENGINEER IF A CERTIFIED DRAWING IS REQUIRED.

HAROLD BECK & SONS INC
NEWTOWN INDUSTRIAL COMMONS NEWTOWN, PENNSYLVANIA 18940 USA

TITLE: **WIRING DIAGRAM GROUP 14-XX6**
120 VOLT 2 AUX SWITCHES 4-20 MA CPS
EXT/RET

DRAWN: CHH 10-12-07	SCALE: NONE	DRAWING NO:	REV:
CHECKED: GMD 10/15/07		17-5117-710	-
APPROVED: JHM 10/16/07		SHEET NO. 1 OF 1	