



THIS DOCUMENT IS A COPY AND IS NOT THE SOURCE DOCUMENT. INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE. THE INFORMATION CONTAINED HEREIN IS COPYRIGHTED BY HAROLD BECK AND SONS, INC. CHANGES TO THE DOCUMENT ARE PROHIBITED. CONTACT A BECK SALES ENGINEER IF A CERTIFIED DRAWING IS REQUIRED.

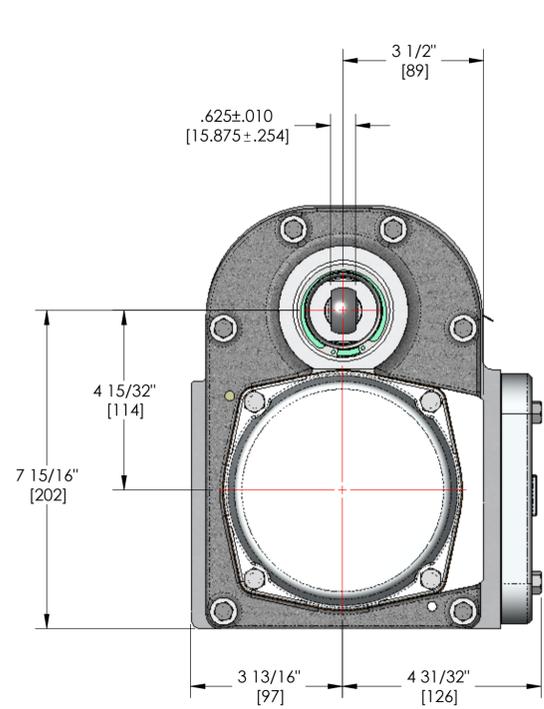


**FRONT VIEW**

**FRONT AND REAR CLEVIS HOLE DIAMETER OPTIONS**


Φ .504±.003 [12.80±.076]
Φ .754±.003 [19.15±.076]
Φ .879±.003 [22.33±.076]

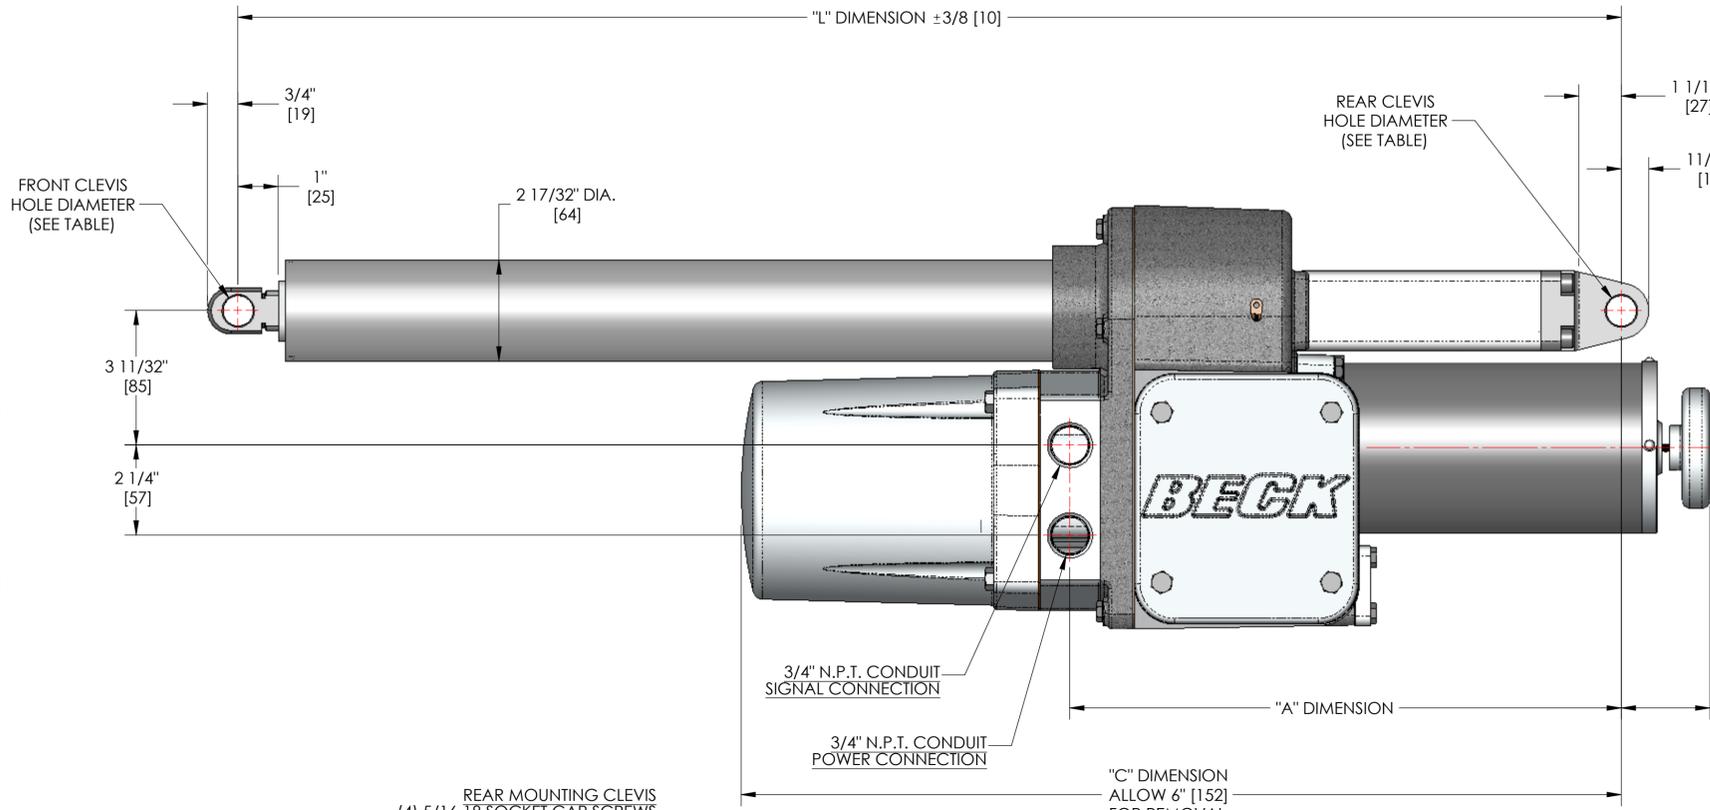

**RIGHT SIDE VIEW**

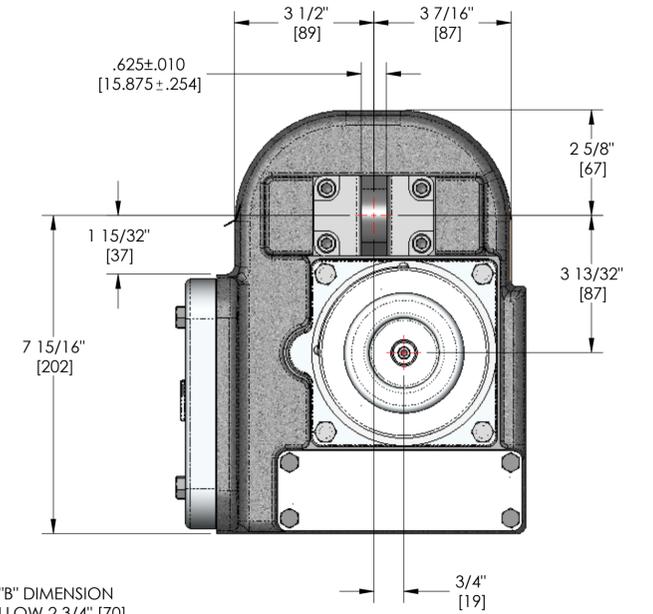

**REAR VIEW**

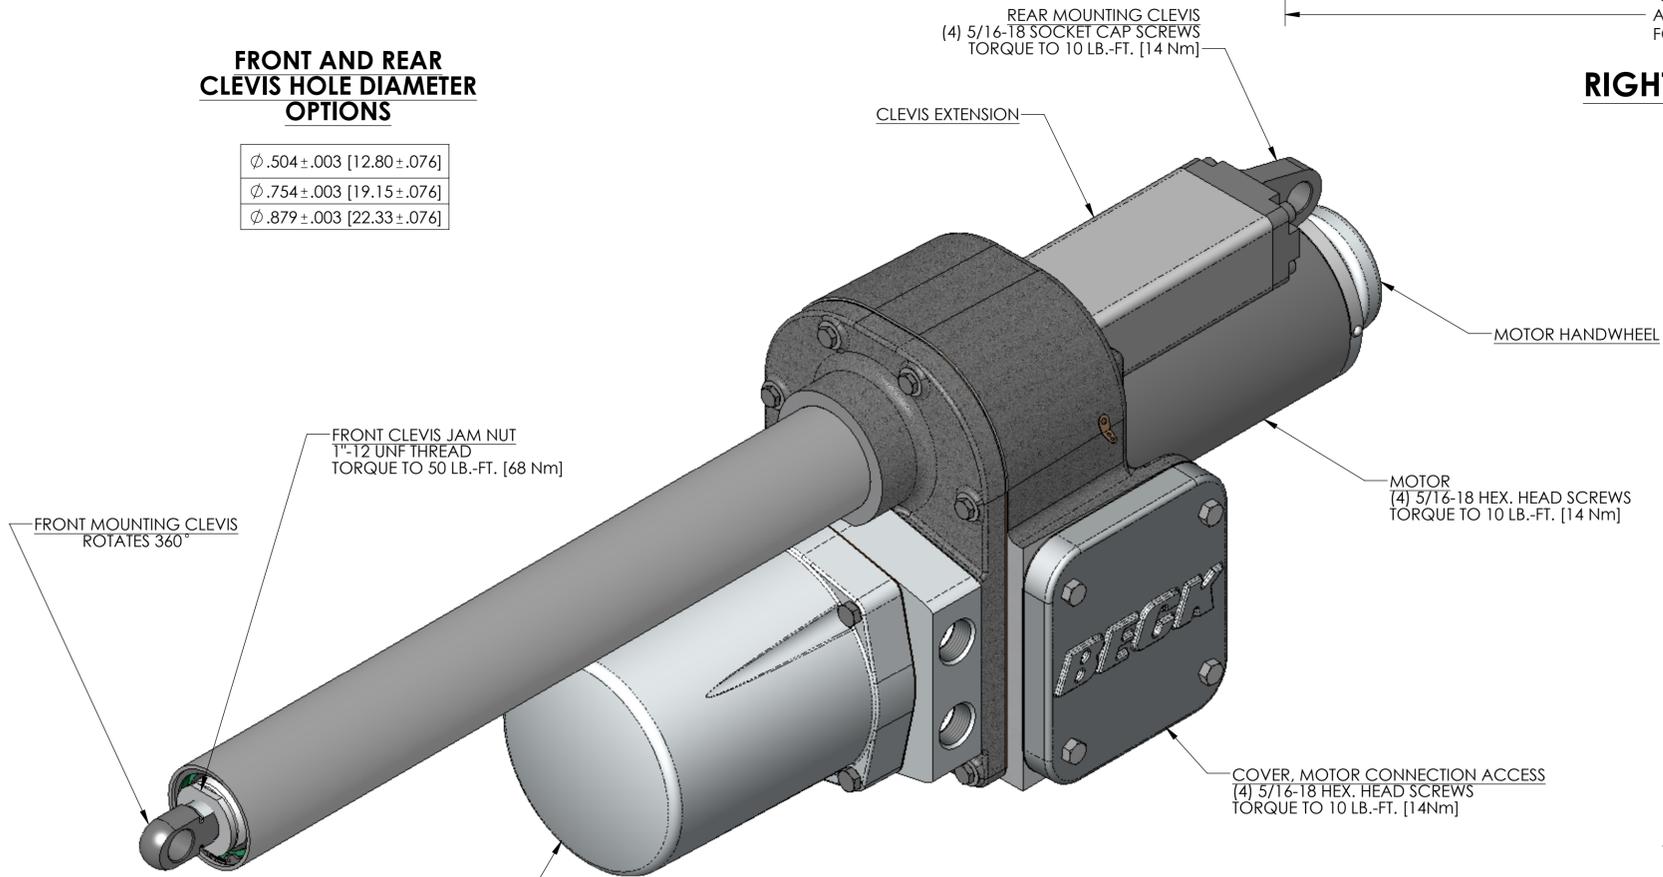

**ISOMETRIC VIEW**

SCALE 1:2



MAXIMUM DRIVE TRAVEL	CLEVIS EXTENSION	"A" DIM.	"B" DIM.	"C" DIM.	"L" DIM. FULLY RETRACTED	"L" DIM. FULLY EXTENDED	120 VOLT APPROX. WT. LBS./KGS.
8" [203]	1.25 [32]	9 1/32 [230]	6 31/32 [177]	17 1/4 [439]	19 27/32 [505]	27 27/32 [708]	64/29
8" [203]	3.90 [99]	11 11/16 [297]	4 5/16 [110]	19 29/32 [506]	22 1/2 [572]	30 1/2 [775]	64/29
8" [203]	4.40 [112]	12 3/16 [310]	3 13/16 [97]	20 13/32 [518]	23" [584]	31" [787]	64/29
8" [203]	6.00 [152]	13 25/32 [350]	2 7/32 [56]	22" [559]	24 19/32 [625]	32 19/32 [828]	65/29
8" [203]	7.00 [178]	14 25/32 [375]	1 7/32 [31]	23" [584]	25 19/32 [650]	33 19/32 [853]	65/29
12" [305]	1.25 [32]	9 1/32 [230]	6 31/32 [177]	17 1/4 [439]	23 27/32 [606]	35 27/32 [910]	66/30
12" [305]	3.90 [99]	11 11/16 [297]	4 5/16 [110]	19 29/32 [506]	26 1/2 [673]	38 1/2 [978]	66/30
12" [305]	4.40 [112]	12 3/16 [310]	3 13/16 [97]	20 13/32 [518]	27" [686]	39" [991]	66/30
12" [305]	6.00 [152]	13 25/32 [350]	2 7/32 [56]	22" [559]	28 19/32 [726]	40 19/32 [1031]	67/30
12" [305]	7.00 [178]	14 25/32 [375]	1 7/32 [31]	23" [584]	29 19/32 [752]	41 19/32 [1056]	67/30
18" [457]	1.25 [32]	9 1/32 [230]	6 31/32 [177]	17 1/4 [439]	29 27/32 [758]	47 27/32 [1215]	69/31
18" [457]	3.90 [99]	11 11/16 [297]	4 5/16 [110]	19 29/32 [506]	32 1/2 [826]	50 1/2 [1283]	69/31
18" [457]	4.40 [112]	12 3/16 [310]	3 13/16 [97]	20 13/32 [518]	33" [838]	51" [1295]	69/31
18" [457]	6.00 [152]	13 25/32 [350]	2 7/32 [56]	22" [559]	34 19/32 [879]	52 19/32 [1336]	70/32
18" [457]	7.00 [178]	14 25/32 [375]	1 7/32 [31]	23" [584]	35 19/32 [904]	53 19/32 [1361]	70/32

**NOTES:**

1. TOLERANCE - ±1/4 [±6] UNLESS OTHERWISE SPECIFIED.
2. ALL DIMENSIONS ARE IN INCHES AND [MM] UNLESS OTHERWISE SPECIFIED. THREADS AND TAPPED HOLES ARE SPECIFIED AS UNIFIED THREAD SIZES ONLY. CONDUIT PIPE THREADS PER AMERICAN NATIONAL STANDARD TAPER PIPE THREADS (N.P.T.)

18-4217-02o

**HAROLD BECK & SONS INC.**  
NEWTOWN INDUSTRIAL COMMONS NEWTOWN, PENNSYLVANIA 18940 USA

TITLE:  
**OUTLINE DIMENSIONS BECK GROUP 42 DRIVE W/ CLEVIS EXTENSION 42-103, 42-105, & 42-107**

DRAWN: GMD 2/25/10	SCALE: NONE	DRAWING NO: <b>18-4217-02o</b>	REV: B
CHECKED: DMS 3/2/10			
APPROVED: JHM 3/2/10		SHEET NO. 1 OF 1	

SIZE: D