


BECK GROUP 88 WIRING DIAGRAM

THIS DOCUMENT IS A COPY AND IS NOT THE SOURCE DOCUMENT. INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE. THE INFORMATION CONTAINED HEREIN IS COPYRIGHTED BY HAROLD BECK AND SONS, INC. CHANGES TO THE DOCUMENT ARE PROHIBITED. CONTACT A BECK SALES ENGINEER IF A CERTIFIED DRAWING IS REQUIRED.

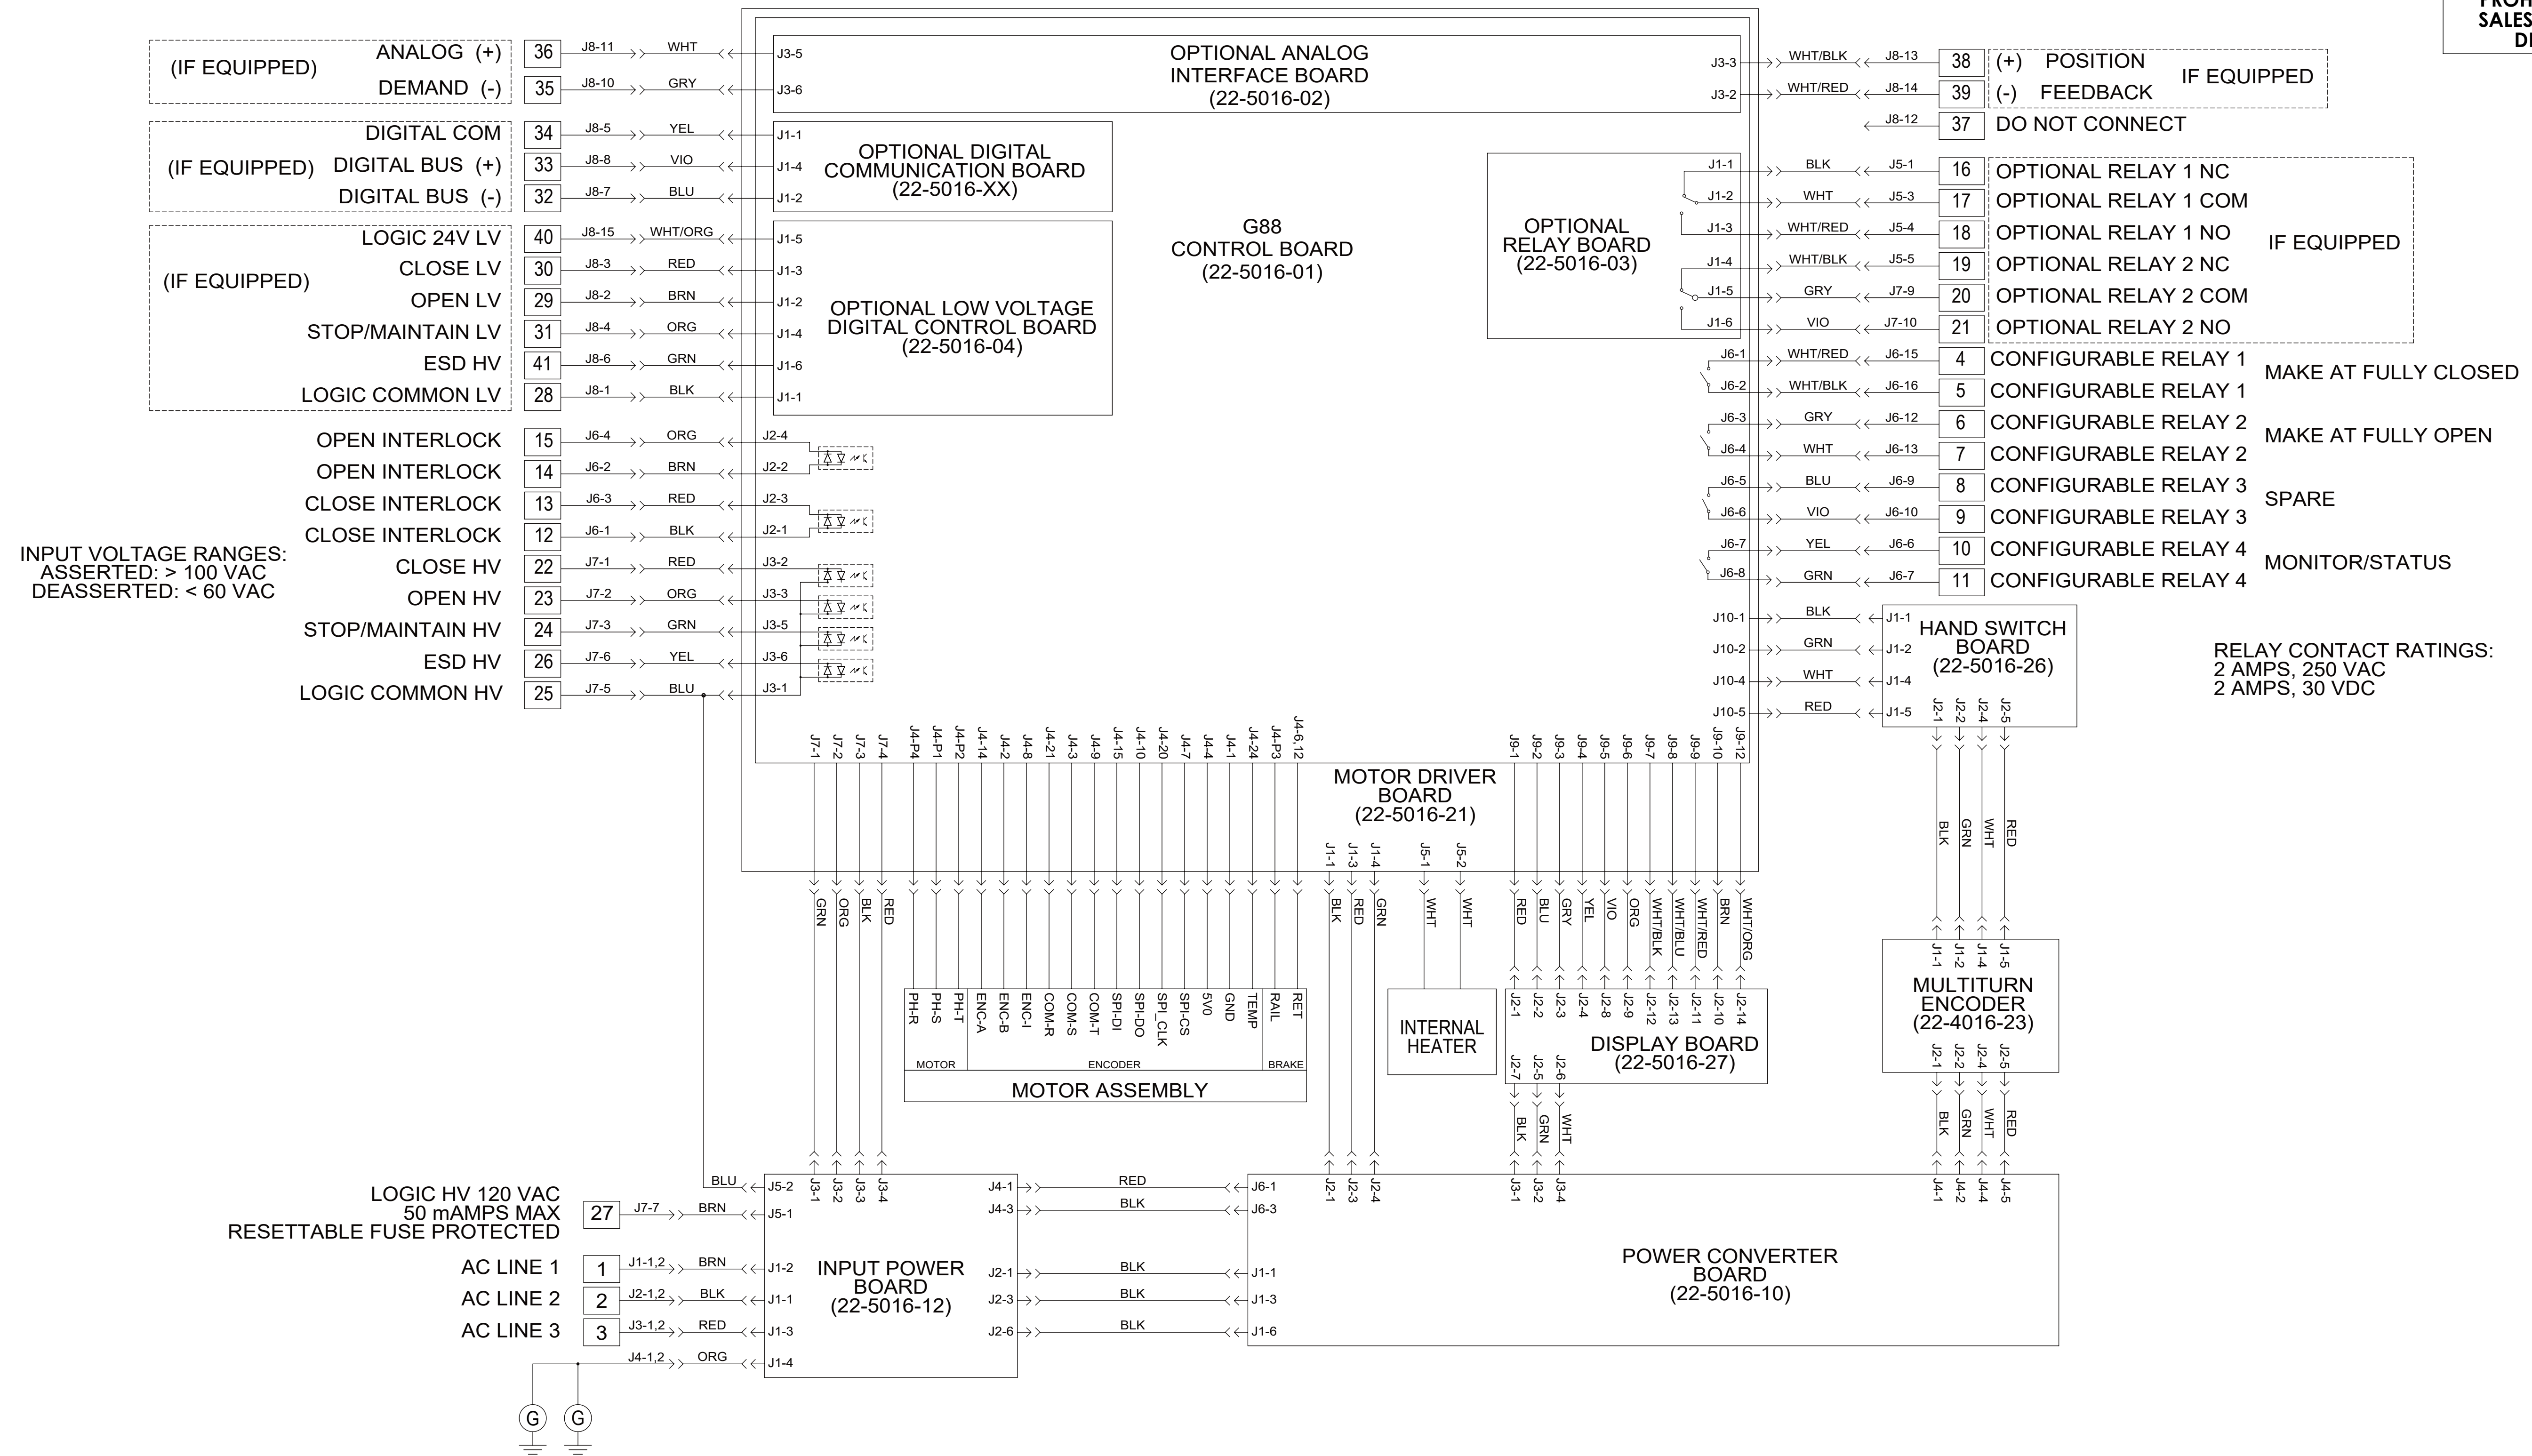

RELAY CONTACT RATINGS:
2 AMPS, 250 VAC
2 AMPS, 30 VDC

INPUT VOLTAGE RANGES:
ASSERTED: > 100 VAC
DEASSERTED: < 60 VAC

LOGIC HV 120 VAC
50 mAMPS MAX
RESETTABLE FUSE PROTECTED

17-0880-00o

HAROLD BECK & SONS INC. <small>NEWTOWN INDUSTRIAL COMMONS NEWTOWN, PENNSYLVANIA 18940 USA</small>			
TITLE: WIRING DIAGRAM, GROUP 88-200, VOLTAGE PER NAMEPLATE			
DRAWN: <small>RRB 07/15/20</small>	SCALE: <small>NONE</small>	DRAWING NO: 17-0880-00o	REV: A
CHECKED: <small>JMJ 07/15/20</small>		SHEET NO. 1 OF 1	
APPROVED: <small>RHK 07/21/20</small>			

SIZE:
D